



RevNo	Revision note	Date	Signature	Checked
B	Drawing Revised	15/01/14	IRG	

FIXINGS FOR FUNCTIONAL 98-328 HANDLES				
HANDLE TYPE	DOOR TYPE	FIXING	FIXING TYPE	
BACK-TO-BACK	39-54mm THICK	F19	M12 X 90 + GRUB SCREW	
BACK-TO-BACK	55-85mm THICK	F20	M12 X 110 + GRUB SCREW	
BACK-TO-BACK	GLASS	F21	M12 X 55 + GRUB SCREW	
BOLT THROUGH	39-54mm THICK	F26	M12 X 70 CSK/DOME CAP	
BOLT THROUGH		F34	M12 X 25 GR 8.8 HEX HD	

FOR FIXING ARRANGEMENTS SEE RELEVANT DRAWINGS

SPIGOT MOUNTED CIRCULAR PULL HANDLES

MATERIAL SPEC:-
 ALUMINIUM: 6063T4
 STAINLESS STEEL: GRADE 316
 WALL THICKNESS: 1.5mm


ALL HANDLES HAVE M12 FIXINGS

SSS = SATIN STAINLESS STEEL
 SAA = SATIN ANODISED ALUMINIUM
 PSS = POLISHED STAINLESS STEEL
 PC = POWDER COATED
 NC = NYLON COATED
 } AVAILABLE IN ANY RAL COLOUR

AVAILABLE IN 25, 32 AND 38mm DIAMETER TUBE
 IN LENGTHS UP TO 2M

ORDERING EXAMPLE: Spigot Mounted Circular pull handle@ 300 mm fixing centres, 32 mm diameter with back/back fixing to suit a glass door see Example below:

SERIES	SIZE	FIXING	Ø	FINISH	DOOR TYPE
98-328	300	F21	32mm	sss	glass door

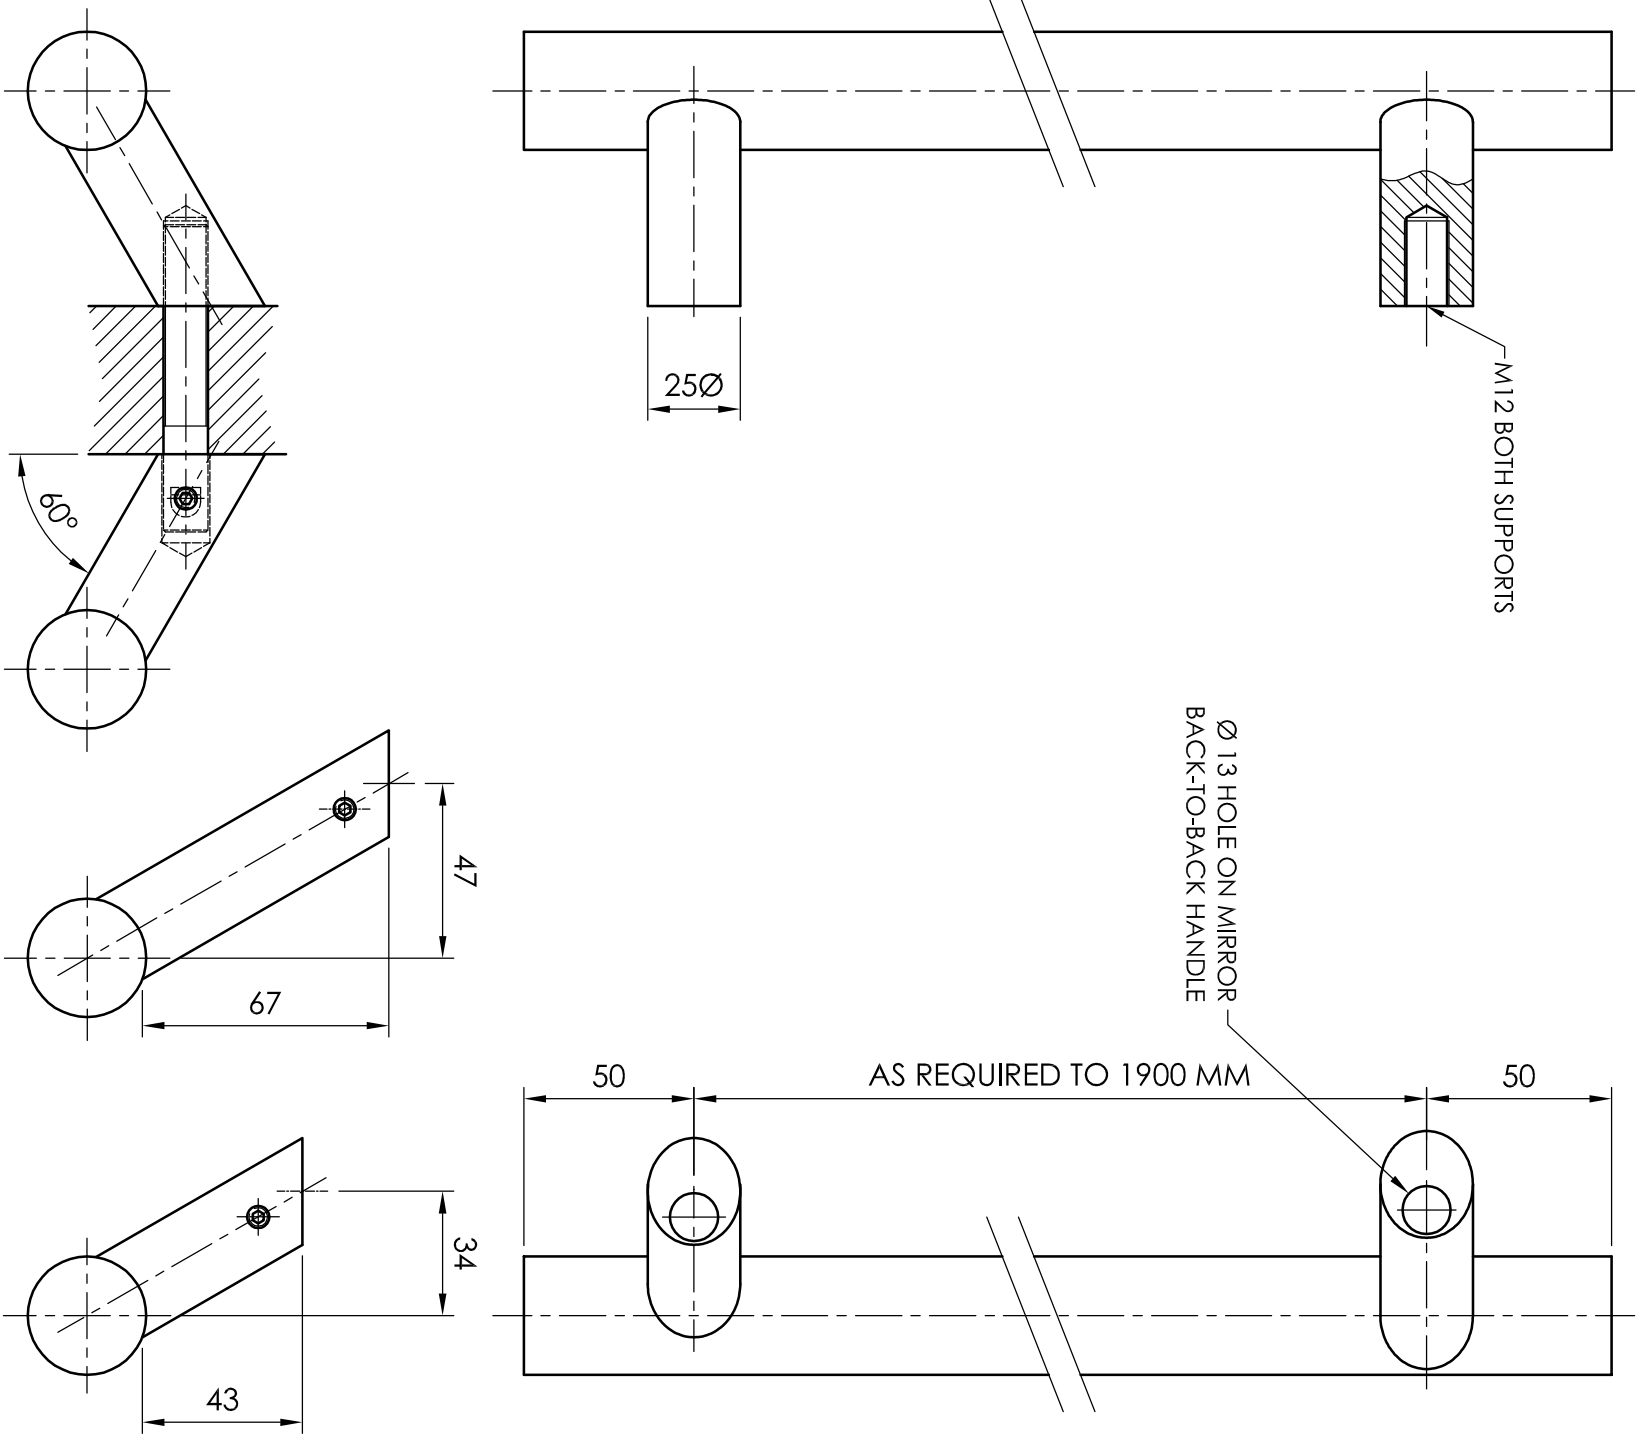

OFFSET CRANKED HANDLES
 BACK-TO-BACK F19 FIXING KIT

OFFSET CRANKED HANDLES

Itemref	Quantity	Title/Name, designation, material, dimension etc	Article No./Reference
Designed by	Checked by	Approved by - date	File name
IRG			FUNCTIONAL 98-328
			Date 25/07/12
			Scale 1:2

alpro

A DIVISION OF:-
 INTERNATIONAL ENGINEERING COMPANY LTD,
 HARWELL ROAD, NUFFIELD ESTATE
 POOLE BH17 0BD TEL: 01202 676272
 FAX: 01202 680101 INFO@IECLTD.CO.UK
 WWW.IECLTD.CO.UK

FUNCTIONAL 98 SERIES

98-328 Issue B Sheet 1/1